

RG-213/U COAXIAL KABLolar



KABLO YAPISI


1- İLETKEN	7x0.75 mm Ø BÜKÜLÜ ELEKTROLİTİK BAKIR İLETKEN
2- YALITKAN	7.25 Ø SOLİD POLİETİLEN
3- EKRAN	ELEKTROLİTİK BAKIR TELLERDEN ÖRGÜ (%95 KAPAMA)
4- DIŞ KILIF	10.30 Ø PVC SİYAH
5- TOPLAM AĞIRLIK	158 Kg
6- STANDART BOY	100/500/1000/2000 mt

KULLANIM ALANLARI

TELSİZ VE RADAR SİSTEMLERİNDE BAĞLANTI KABLOSU OLARAK KULLANILIR.

TEKNİK ÖZELLİKLER

1- YALITIM DİRENCİ	>2000 M Ω km	5- TEST VOLTAJ (50Hz)	10.0 kV.
2- EFEKTİF KAPASİTE	101 pF/m	6- BÜKÜLME ÇAPI	15x D mm
3- YAYILMA HIZI	% 66	7- ÇALIŞMA SICAKLIĞI	-40°C ~ +70°C
4- ÇALIŞMA VOLTAJ	5.0 kV	8- EMPEDANS	50±2 Ω

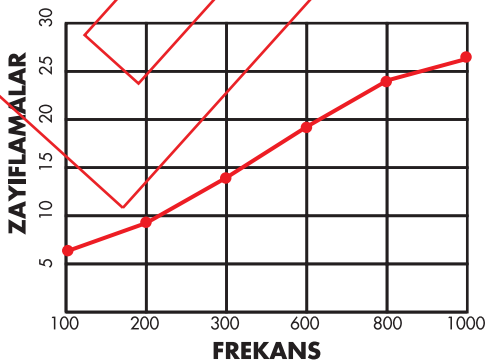

ZAYIFLAMALAR (20 °C) :

100 Mhz	: 6.5	dB/100 mt
200 Mhz	: 9.4	dB/100 mt
300 Mhz	: 14.8	dB/100 mt
600 Mhz	: 19.5	dB/100 mt
800 Mhz	: 24.0	dB/100 mt
1000 Mhz	: 26.4	dB/100 mt